


13-5/8


35K HYDRAULIC  
POWER TONG

[STARROILTOOLS.COM](http://STARROILTOOLS.COM)

**STARR**

OIL TOOLS, LLC

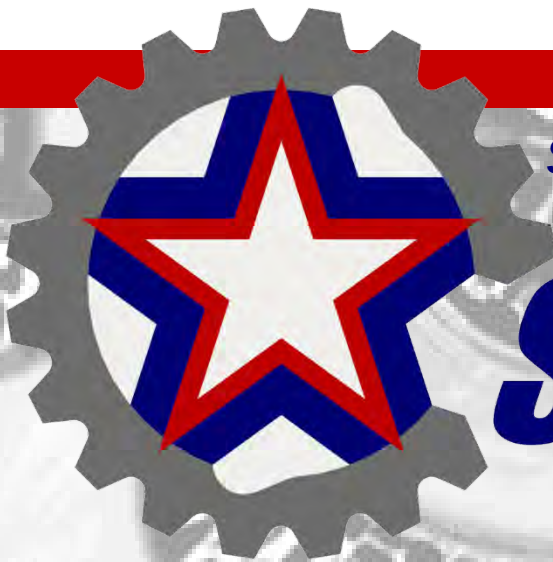



# 13-5/8 SPECIFICATIONS

## TORQUE TABLE

PRESSURE	HIGH GEAR	LOW GEAR
PSI / MPa	Lb-ft / Nm	Lb-ft / Nm
1500 / 10.34	3600 / 4881	17900 / 24269
2000 / 13.79	5070 / 6874	25210 / 34180
2500 / 17.24	6540 / 8867	32510 / 44078
2750 / 18.96	7270 / 9857	36170 / 49040
<b>MAXIMUM RATED TORQUE: 35000 Lb-ft / 47454 Nm</b>		

## SPEED TABLE

FLOW (US GPM / LPM)	LOW GEAR (RPM)	HIGH GEAR (RPM)
10 / 37.85	1.7	9
20 / 75.71	3.4	17
40 / 151.42	6.8	34
60 / 227.12	10.2	51

**Hydraulic Requirements (Max.):** 60 US GPM / PSI (227.12 LPM / 20.68 Mpa)

**Length (Doors Closed):** 58.9 in / 149.7 cm

**Height:** 46.8 in / 119.0 cm

**Width:** 34.2 in / 86.9 cm

**Space Required on Pipe:** 8 in / 20.3 cm

**Maximum Elevator Diameter:** N/A

**Torque Arm Length:** 36 in / 91.4 cm (Center of pipe to Center of anchor)

**Approximate Weight:** 1430 Lb / 649 kg

**JAWS AVAILABLE: 7" – 13 5/8"**

*(Other sizes available upon request)*

**13-5/8**

**STARR**

OIL TOOLS, LLC